


Model NO.	R4A
-----------	-----

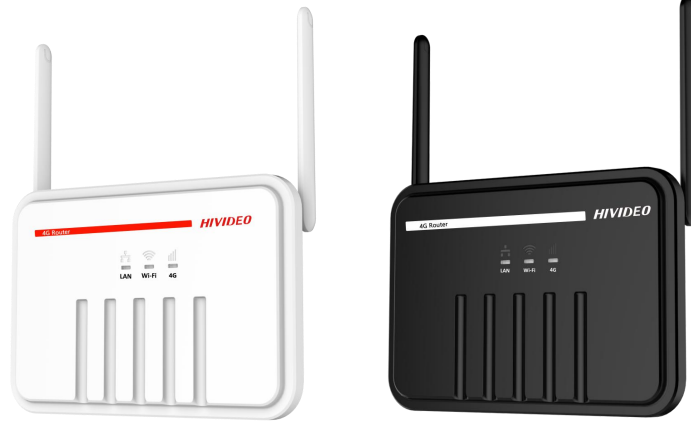

Motherboard specifications

Platform chipset	ASR 1803S
WiFi chip	SV6318
Number of WiFi connections	8
Power	<10W
DC	5V/2A
USIM/SIM card	Only supports built-in USIM in China
Indicator lights	4G indicator light, WiFi indicator light, wired network port indicator light
Antenna	2x 4G antennas, 2x WIFI antennas
Press the key	RST/WPS integrated button
Network port	1x LAN, 10/100 BaseT auto-adaptive network port
Static electricity test	Contact discharge $\pm 8KV$, air discharge $\pm 10KV$

Wireless technology

4G standard	WCDMA、FDD-LTE、TDD-LTE
4G frequency band	Asia: B1、B3、B5、B7、B8、B20、B38、B40、B41
	Europe: B1、B3、B7、B8、B20、B28A、B28B
4G speed	LTE CAT 4 FDD-LTE(DL/UL) 150Mbps/50Mbps HSPA+ (DL/UL) 21/5.76Mbps
WIFI frequency band	2.4G frequency
WIFI standard	IEEE 802.11 b/g/n/ax
WIFI maximum speed	229Mbps

Software

Firmware upgrade	Web page upgrade
WIFI security mode	WPA-PSK& WPA2-PSK
IPv4	Support

IPv6	Support
Data volume statistics	Support
SIM lock	Support
HTTP protocol	Support
HIVIDEO HIPLUS APP Management	Support
Work environment	
Operation temperature	-10℃ ~ +65℃
Humidity	5%~ 95%
Basic information	
Housing	Plastic , IP66
Size	166 * 167 * 38mm (antenna folding size)
Weight	0.2kg
Colour	White/Black
www.hivideocctv.com	